


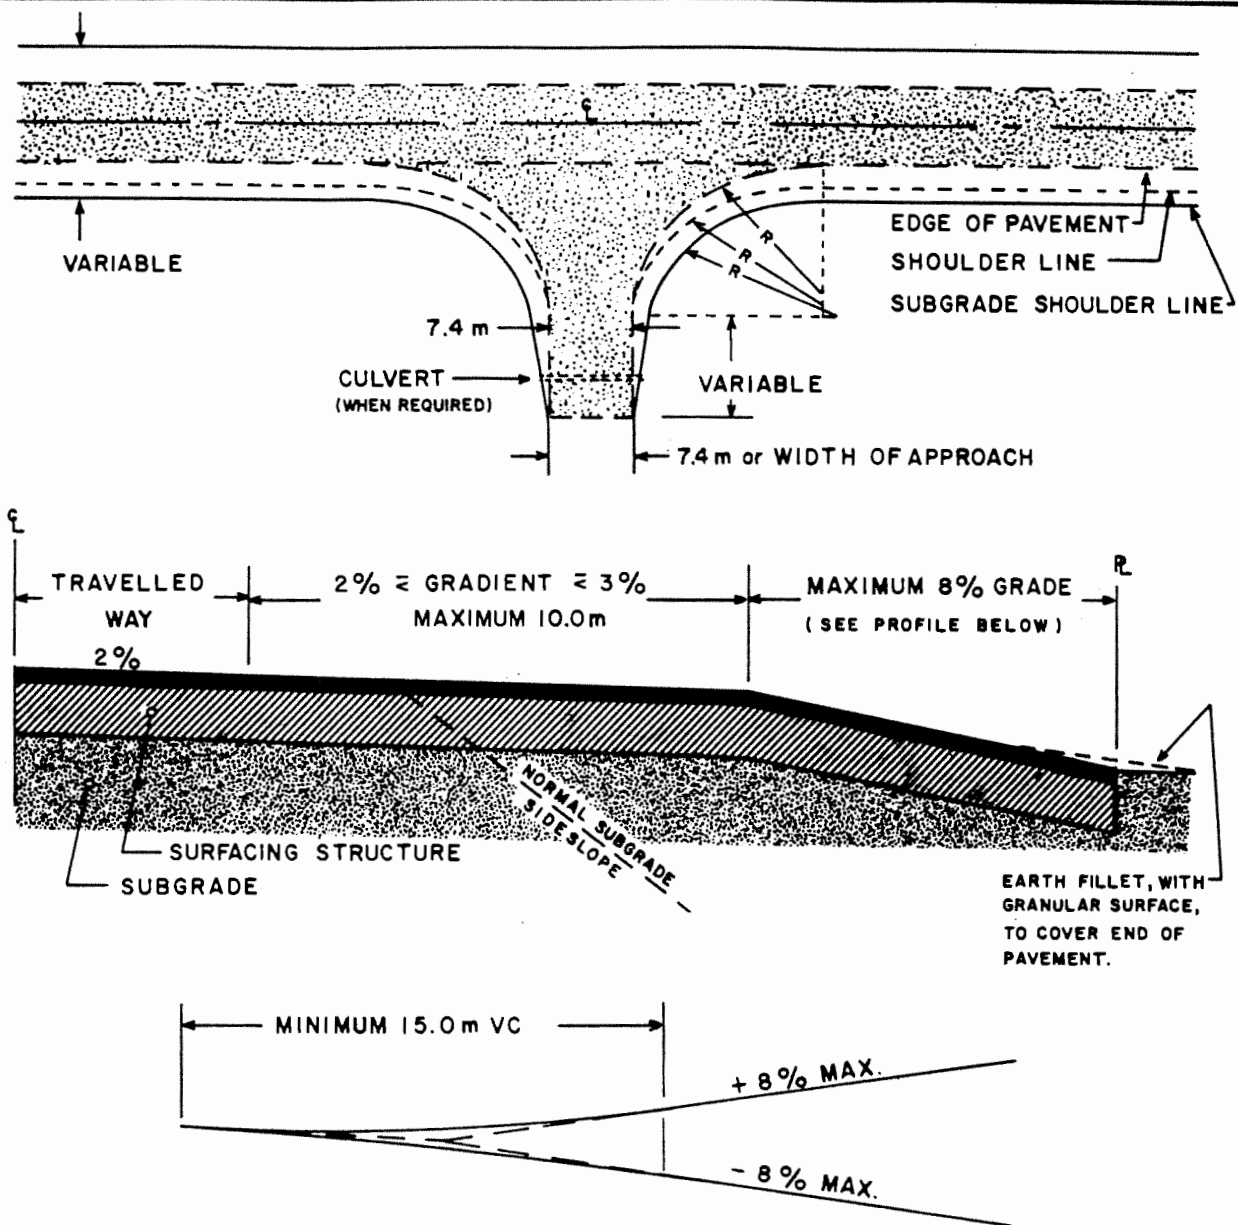

NOTES:

- (1) FOR DETAILS ON R SEE STANDARD PLAN No. 20600.
- (2) APPROACH SURFACE SHALL BE CROWNED 2%.
- (3) PAVED HIGHWAY IS A HIGHWAY WITH A PAVEMENT "B" OR HIGHER TYPE SURFACE.
- (4) PAVED APPROACHES SHALL BE USED AT THE FOLLOWING INTERSECTIONS:
 - HIGHWAYS, COMMUNITY ACCESS, GRID ROADS, MAIN FARM ACCESS ROADS, AND MUNICIPAL ROADS WHERE ADT > 100.
- (5) APPROACH SIDESLOPES ARE: 6:1 to h = 3m
 variable sideslopes h = 3m to 6m
 use 2:1 sideslopes when h > 6m

RECOMMENDED:

ROAD DESIGN ENGINEER

APPROVED:

CHIEF ENGINEER

DATE: MAY 23, 1978

SASKATCHEWAN DEPARTMENT OF HIGHWAYS

PAVED ROAD APPROACH

ON

PAVED CLASS HIGHWAYS

STANDARD

PLAN

No.

21200T