



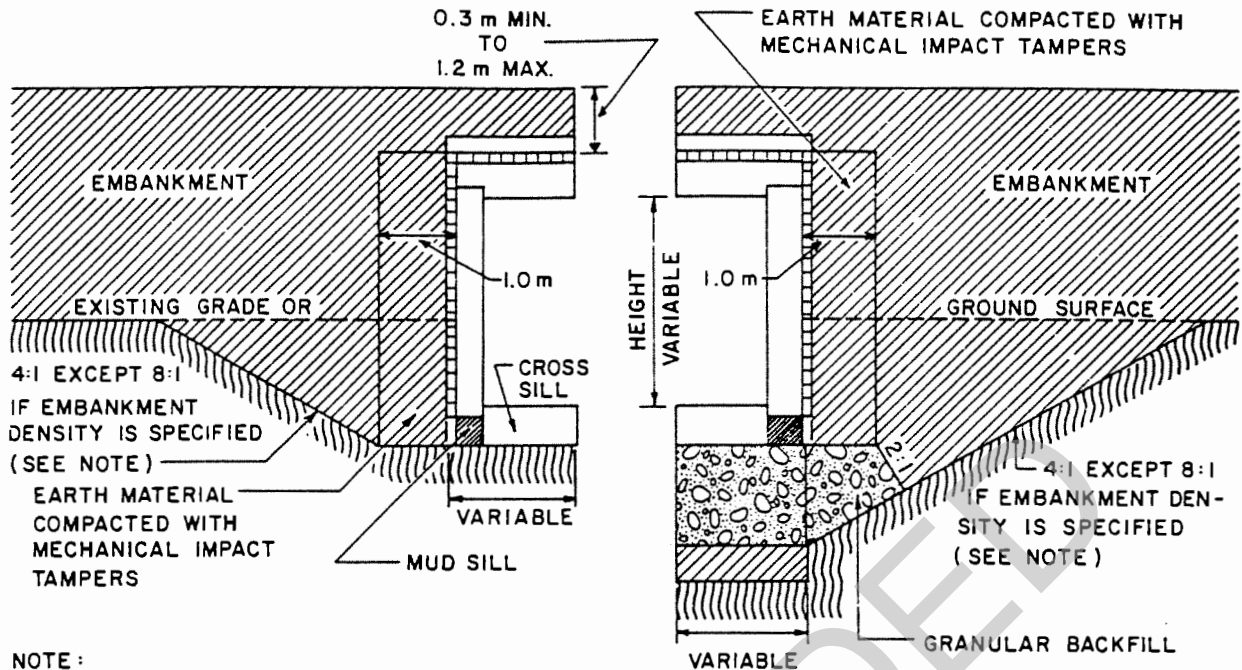

NOTE:


1. THE ABOVE SPECIFIED SLOPES WILL APPLY TO DEPTHS OF SUBCUT OF 4 m AND 2 m RESPECTIVELY. WHERE THESE DEPTHS ARE EXCEEDED THE HORIZONTAL DISTANCE BETWEEN THE TOE AND TOP OF SLOPE WILL BE MAINTAINED AT 16 m AND THE SLOPE STEEPENED.

SECTION A-A

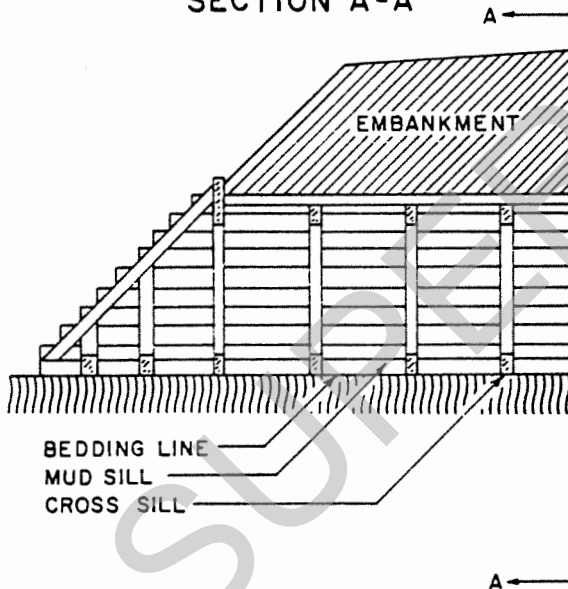

ELEVATION WITHOUT  
GRANULAR BACKFILL

SECTION B-B

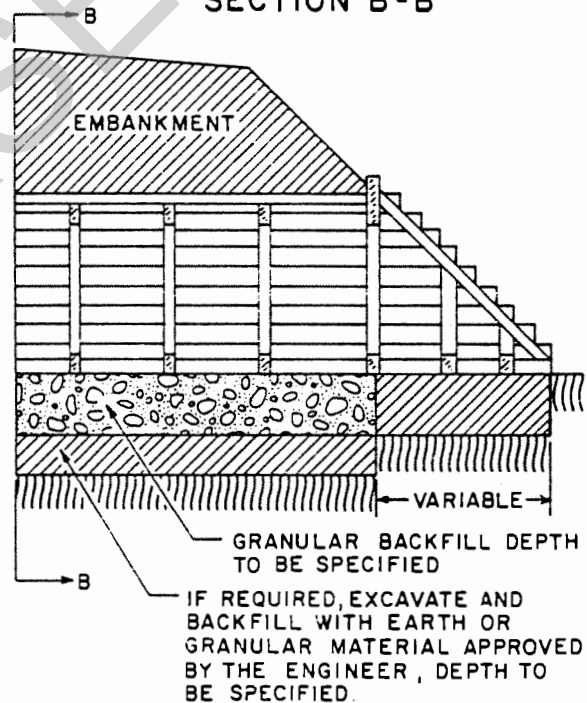

ELEVATION WITH  
GRANULAR BACKFILL

RECOMMENDED *[Signature]*  
PR. GEOTECHNICAL ENGINEER  
RECOMMENDED *[Signature]*  
ROAD DESIGN ENGINEER  
APPROVED *[Signature]*  
CHIEF ENGINEER  
DATE: JULY 14, 1977

SASKATCHEWAN DEPARTMENT OF HIGHWAYS

BACKFILLING FRAMED  
TIMBER CULVERTS

STANDARD  
PLAN  
NO.  
22160