



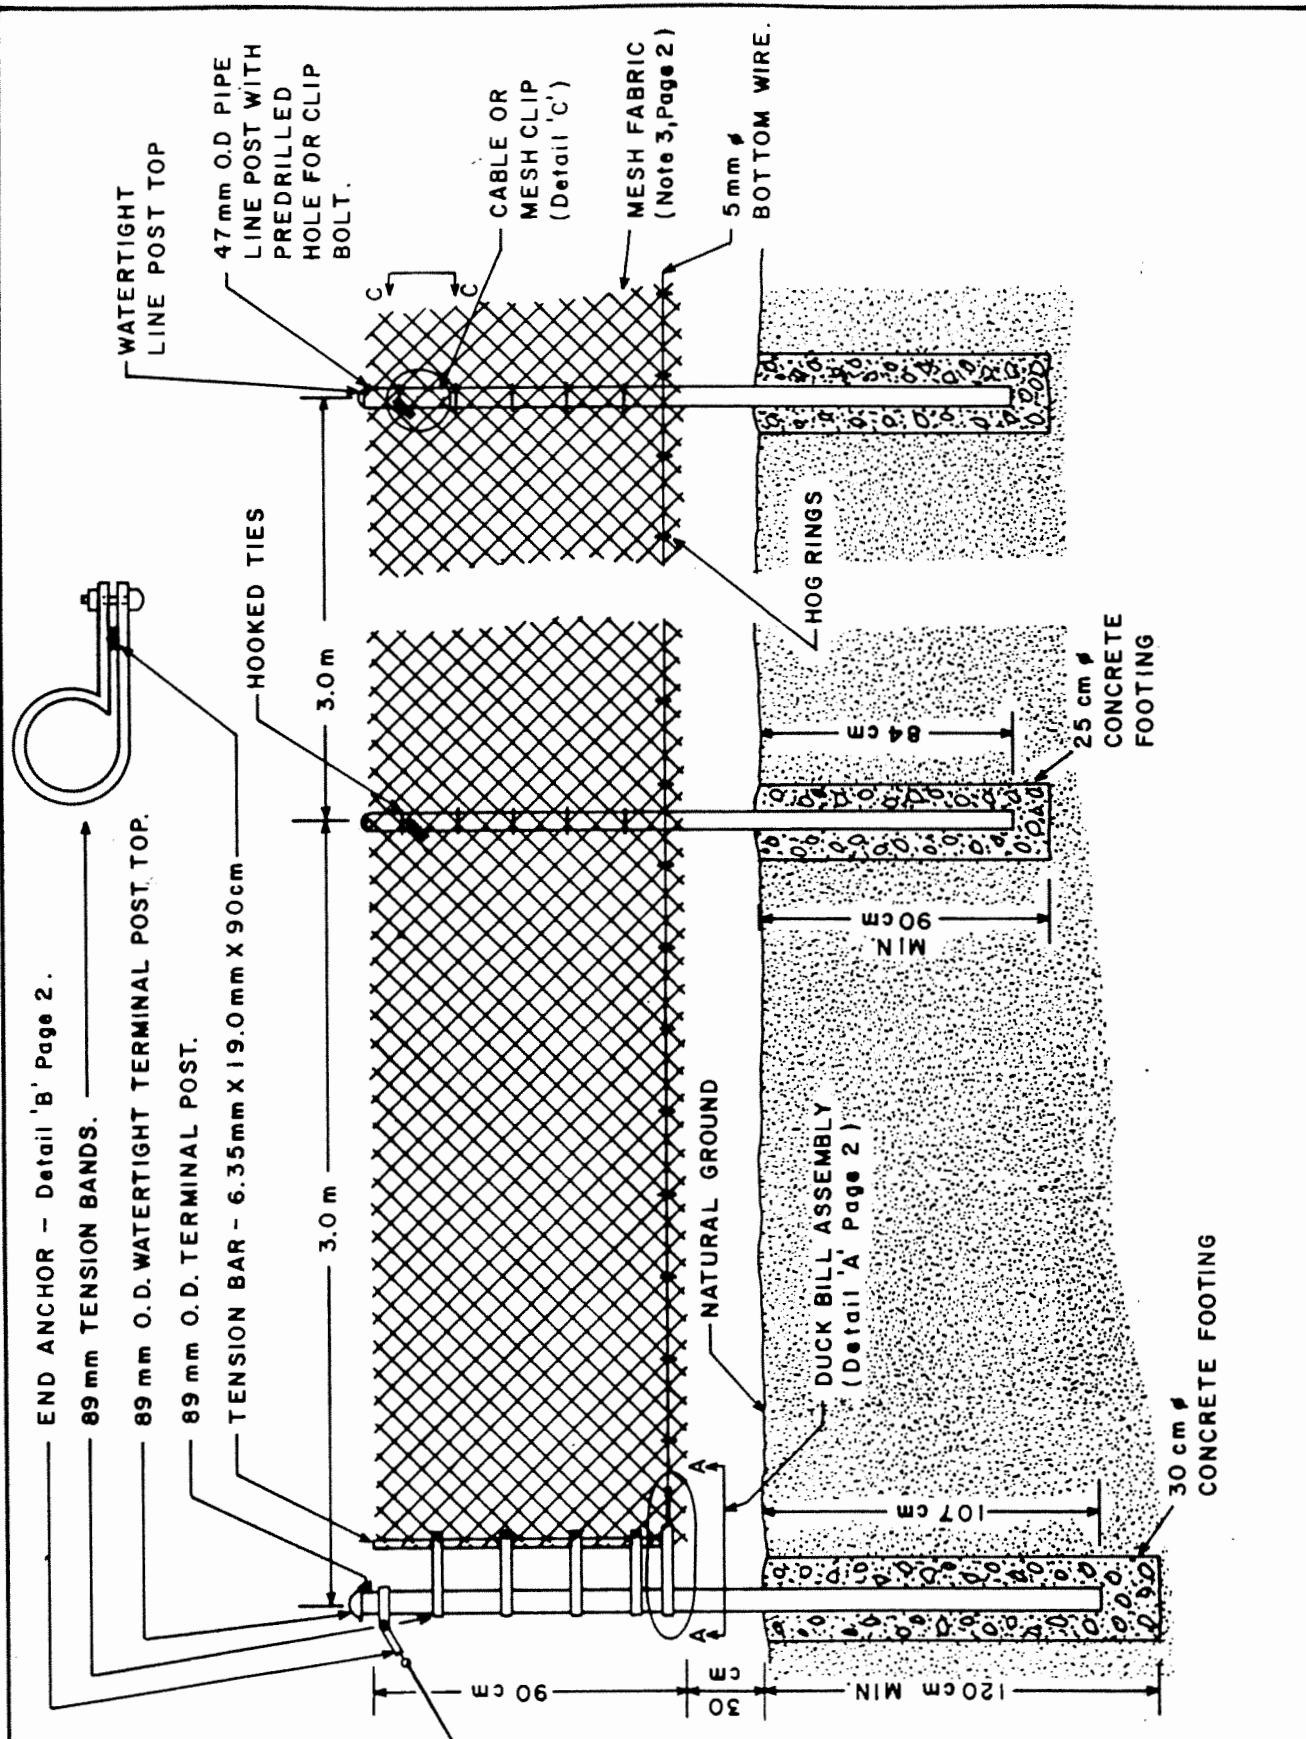


RECOMMENDED
J. J. Smyke
 ROAD DESIGN ENGINEER
 APPROVED:
[Signature]
 ASSOC. DEPUTY MINISTER (ENGINEERING)
 DATE: APRIL 22, 1985

SASKATCHEWAN DEPARTMENT OF HIGHWAYS
 AND TRANSPORTATION
 MEDIAN CHAIN LINK FENCE


STANDARD
 PLAN
 No.
 26550
 PAGE 1 OF 2

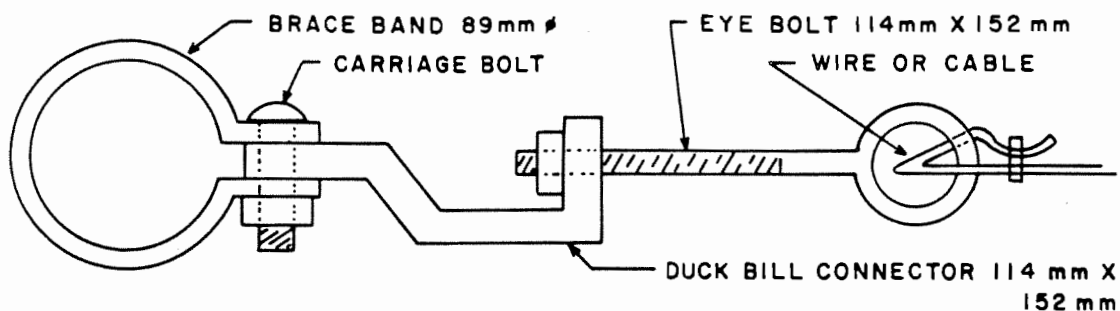

DETAIL 'A' - DUCK BILL ASSEMBLY

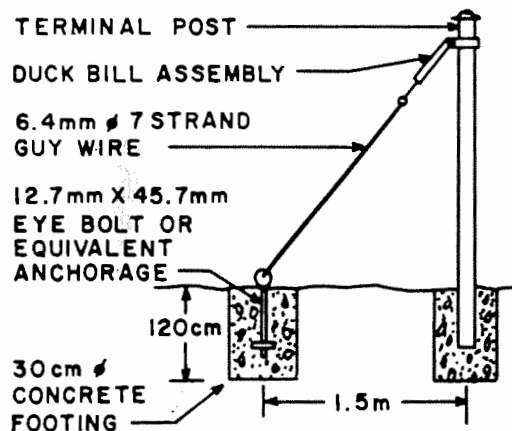

DETAIL 'B' - END ANCHOR

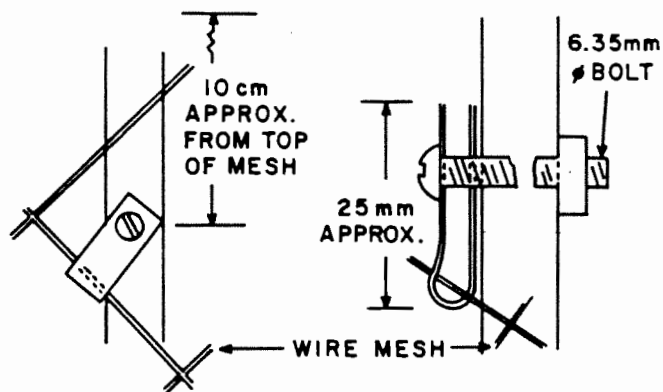

DETAIL 'C' - CABLE OR MESH CLIP

NOTES:

1. MEDIAN FENCE CAN BE USED EITHER WITH OR WITHOUT TOP WIRE. IF TOP WIRE USED, IT IS TO BE INSTALLED SAME AS TOP WIRE IN STANDARD PLAN 26560.
2. IF TOP WIRE IS USED, IT SHALL BE 5.0 mm THICK (6 GAUGE) WIRE AND FASTENED AT EACH END WITH A DUCK BILL ASSEMBLY.
3. CHAIN LINK FENCE FABRIC SHALL BE 3.75 mm THICK (9 GAUGE) 5.08 cm MESH UNLESS A TOP CABLE IS USED. IF A TOP CABLE IS USED, FENCE FABRIC SHALL BE 3.05 mm THICK (11 GAUGE) 5.08 cm MESH.
4. MAXIMUM SPACING BETWEEN BRACING SHALL BE 150 METRES.
5. IF TOP WIRE IS NOT USED, MESH CAN BE WOVEN ON ALTERNATE SIDES OF POSTS.
6. CHAIN LINK FABRIC SHALL BE FASTENED AT NOT MORE THAN 35 cm ON LINE POSTS AND NOT MORE THAN 45 cm ON THE TOP AND BOTTOM WIRE.
7. ALL MATERIALS AND INSTALLATION TO MEET STANDARD SPECIFICATION FOR SUPPLY AND ERECTION OF CHAIN LINK FENCE.

RECOMMENDED:
[Signature]
 ROAD DESIGN ENGINEER
 APPROVED:
[Signature]
 ASSOC. DEPUTY MINISTER (ENGINEERING)
 DATE: APRIL 22, 1985

SASKATCHEWAN DEPARTMENT OF HIGHWAYS
 AND TRANSPORTATION
 MEDIAN CHAIN LINK FENCE

STANDARD
 PLAN
 No.
 26550
 PAGE 2 OF 2