



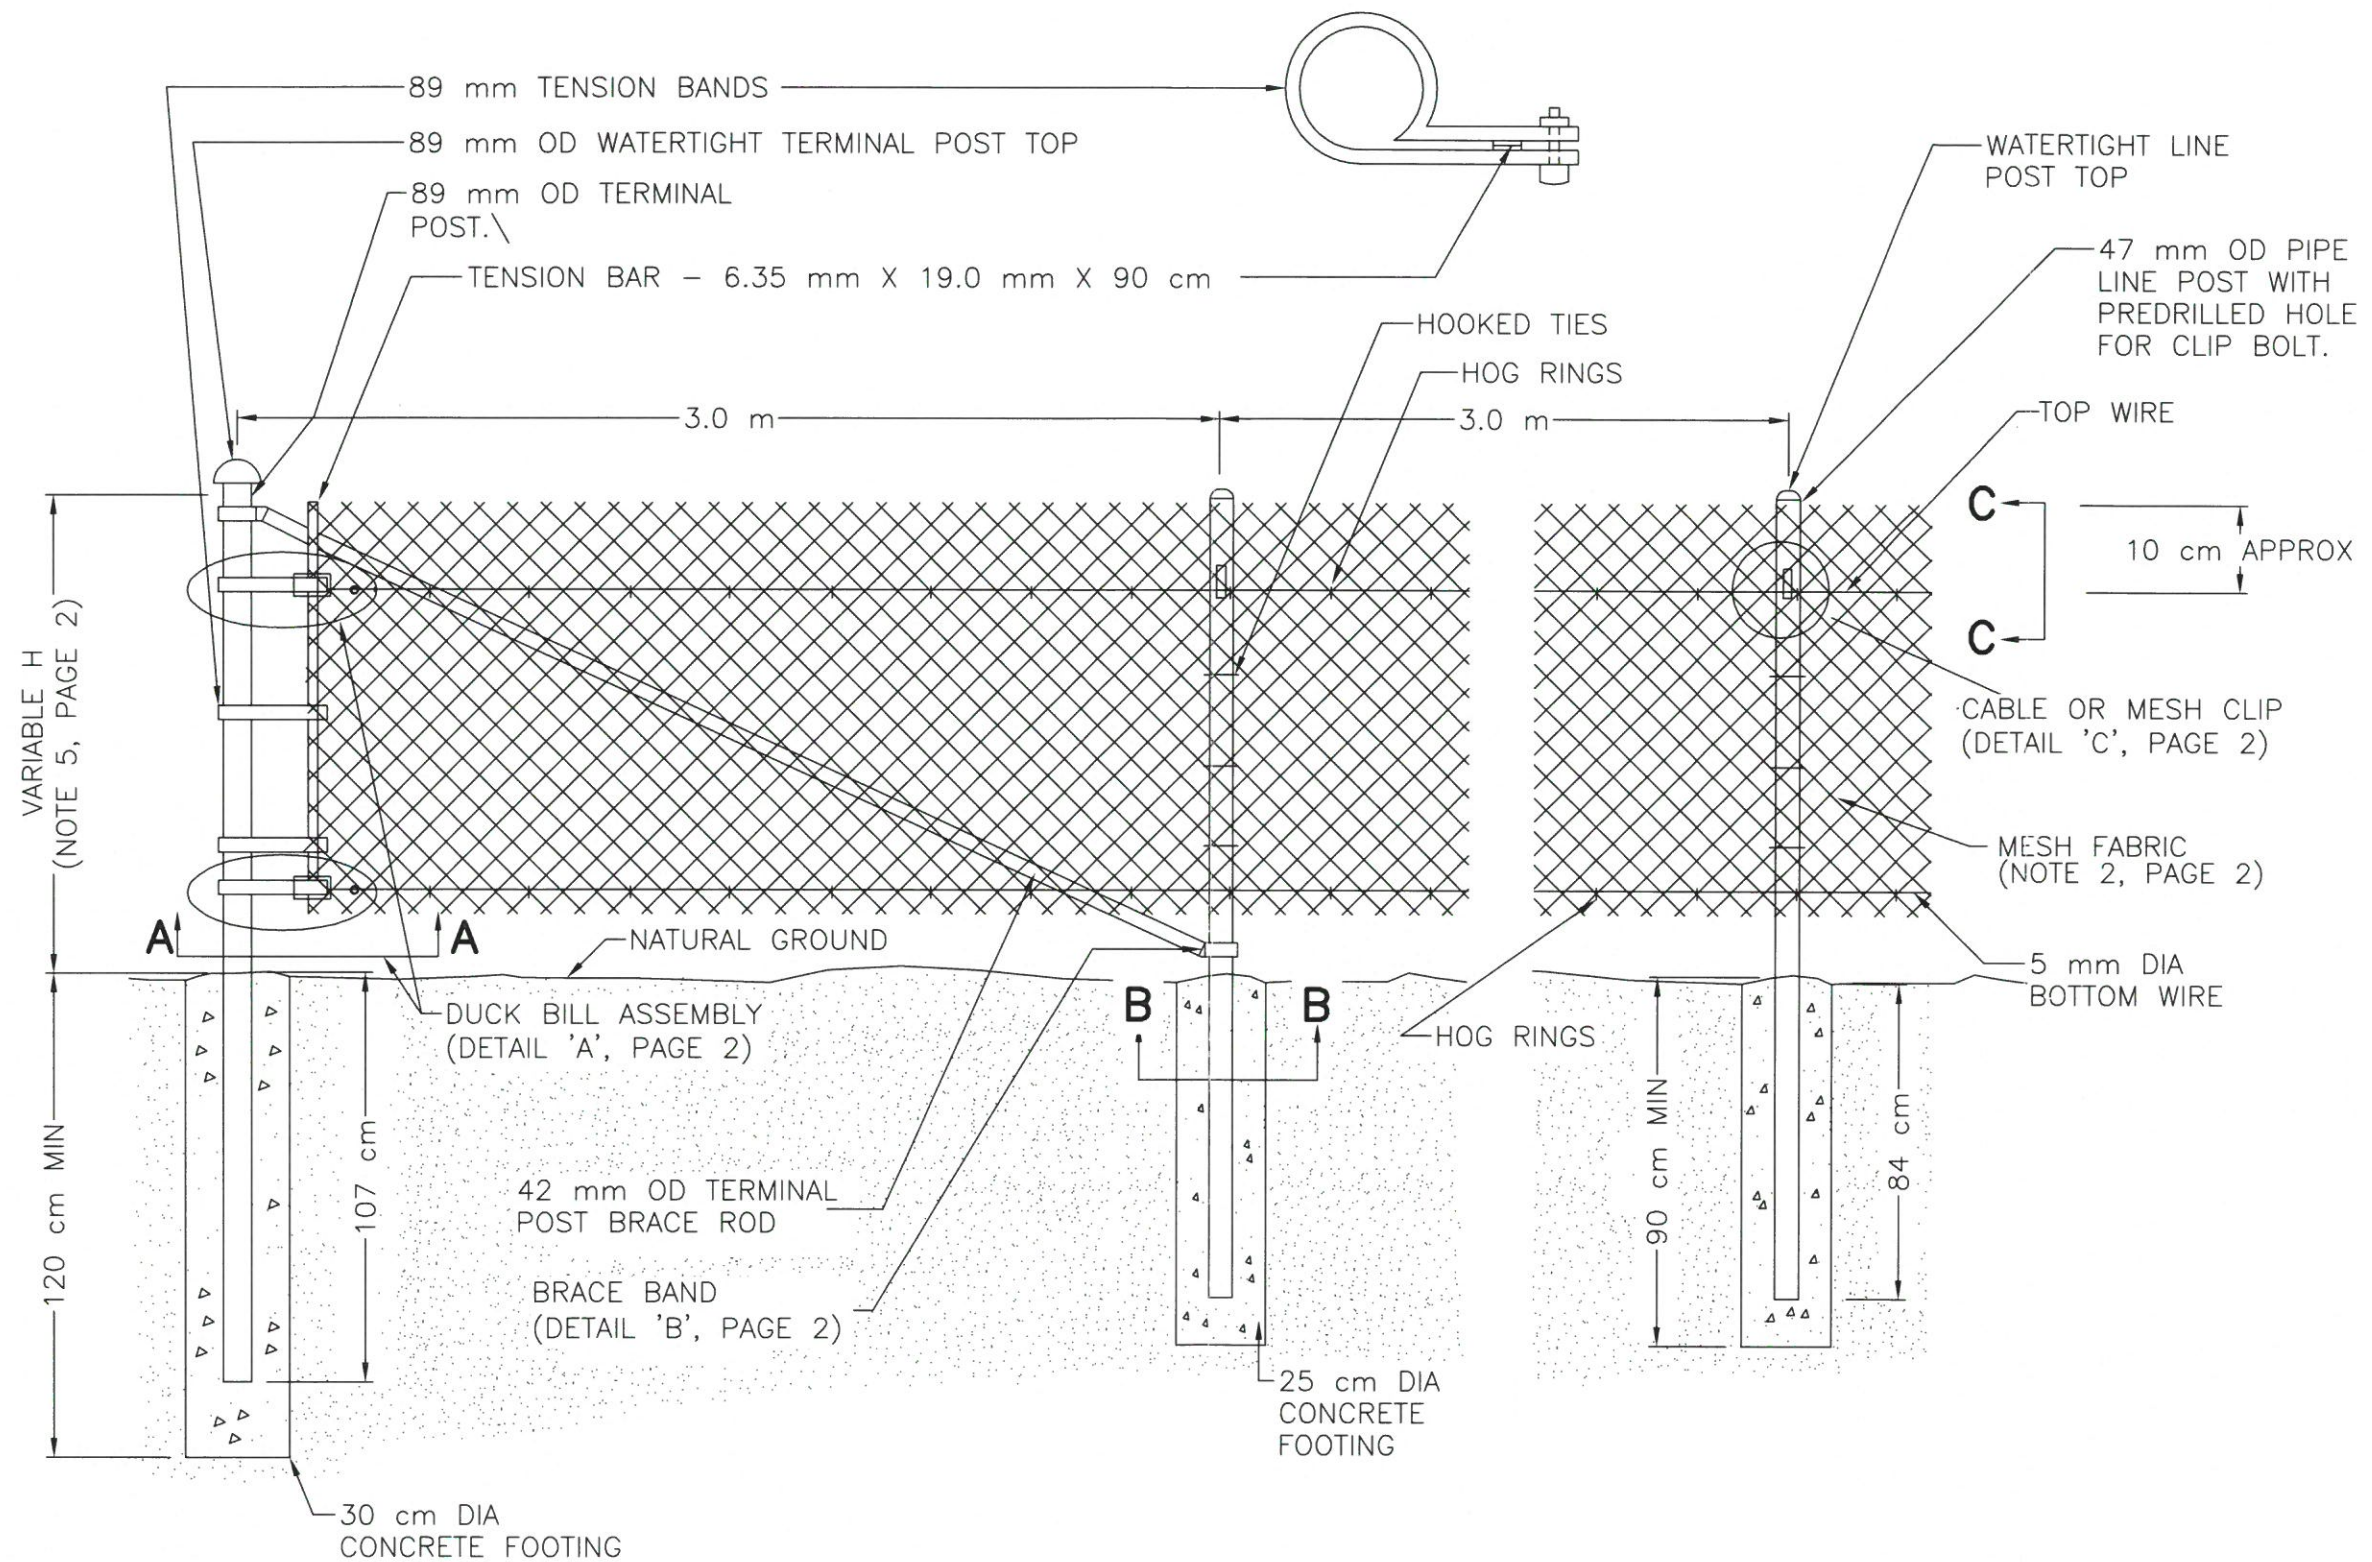


CHAIN LINK FENCE TYPE A

RECOMMENDED BY		DIRECTOR DESIGN & TRAFFIC ENG	DATE	2016-03-21	STANDARD PLAN NO	26560
APPROVED BY		EXECUTIVE DIRECTOR TECHNICAL STANDARDS BRANCH	DATE	May 5/16	SHEET	1 OF 2

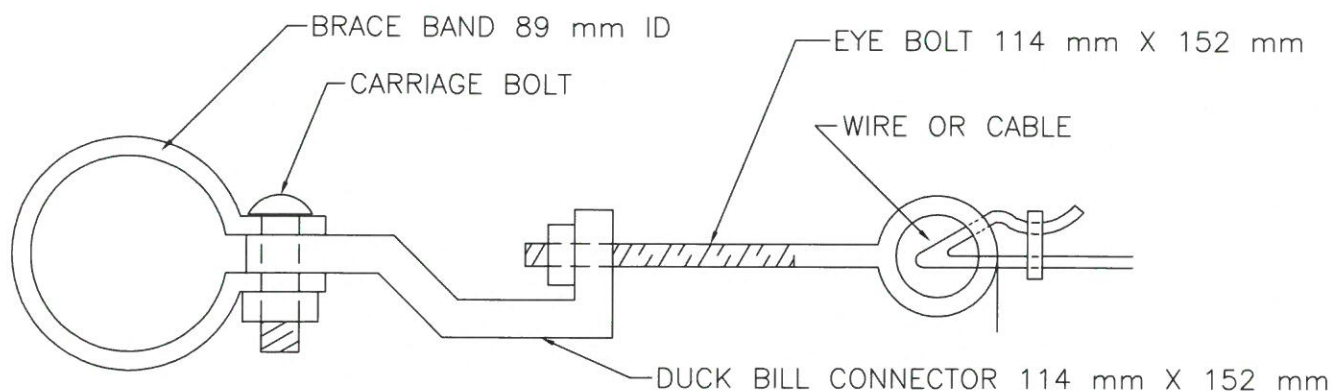

DETAIL 'A' - DUCK BILL ASSEMBLY

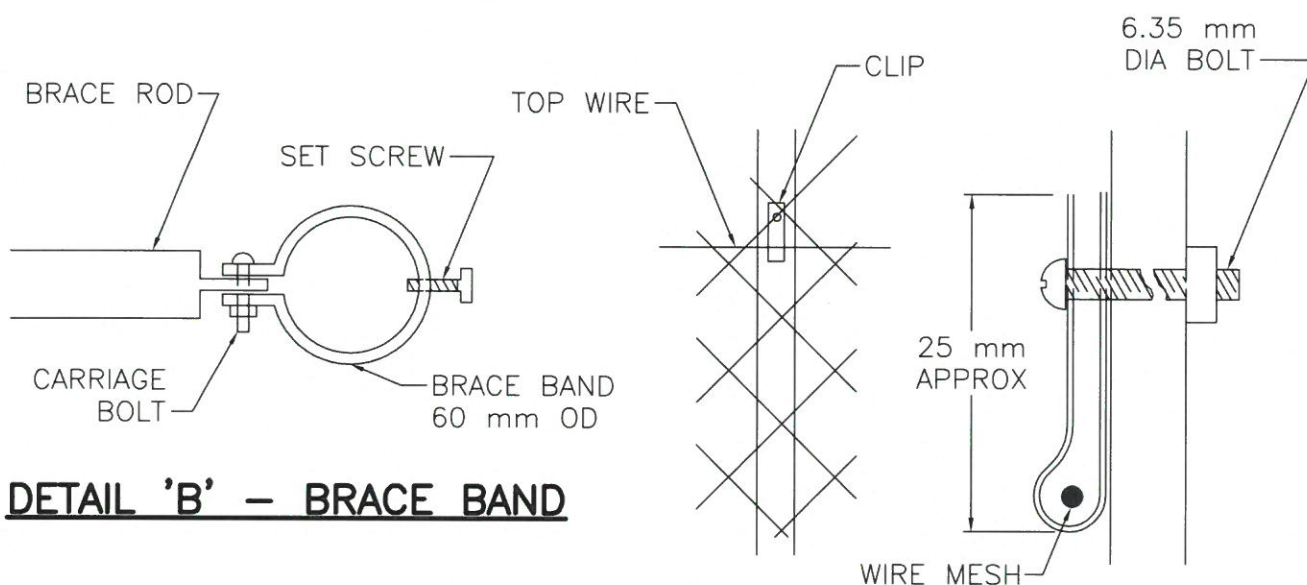

DETAIL 'B' - BRACE BAND

DETAIL 'C' - CABLE OR MESH CLIP

NOTES:

1. Maximum spacing between bracing shall be 150 metres.
2. Chain link fence fabric shall be 3.05 mm thick (11 gauge) 5.08 cm mesh unless special circumstances make a heavier gauge desirable.
3. Top wire only is to be threaded through clips with mesh attached to wire.
4. Chain link fabric shall be fastened at not more than 35 cm on line posts and not more than 45 cm on the top and bottom wire.
5. Minimum height, H, to be used will be 1.5 metres.
6. Top wire will be 6.4 mm 7 strand guy wire, grade 50.
7. All materials and installations to meet standard specifications for supply and erection of chain link fence.