


CONTINUOUS MEDIAN BARRIER



OPERATING SPEED (km/hr)	L (m)	FLARE X:Y*
> 100	30 min	15:1 MIN 25:1 PREFERRED USE 25:1 ON OUTSIDE OF CURVES
60-100	18 min	15:1 USE 20:1 ON OUTSIDE OF CURVES
< 60	12 min	10:1 MIN 15:1 PREFERRED
* DEFINES THE RATE OF DIVERGENCE OF THE BARRIER FROM THE EDGE LINE OF THE ROADWAY.		

1. Clearance between guardrail and obstruction:
 - Desirable: 1.2 m.
 - Minimum: 0.6 m, using reduced post spacing.

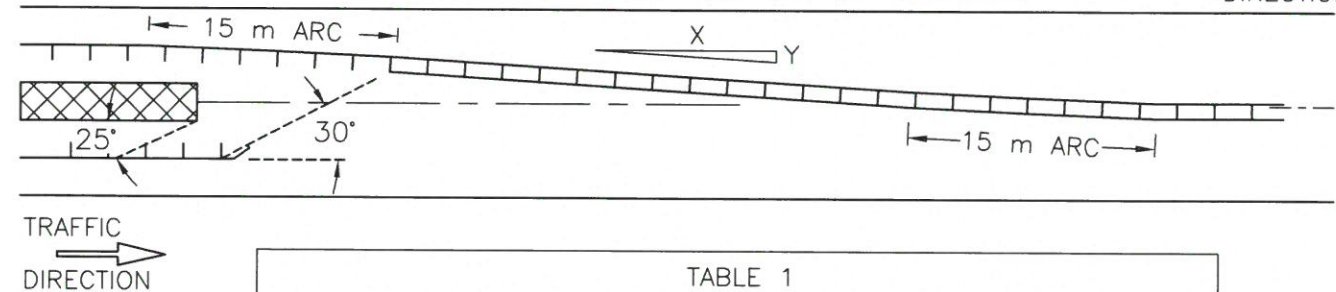

SEMI-RIGID SAFETY BARRIERS LAYOUT FOR MEDIAN OBSTRUCTIONS

RECOMMENDED BY		DIRECTOR DESIGN & TRAFFIC ENG	DATE	2016-03-30	STANDARD PLAN NO	28731
APPROVED BY		EXECUTIVE DIRECTOR TECHNICAL STANDARDS BRANCH	DATE	Apr 8, 2016	SHEET	1 OF 1

ACAD DWG: SKS28731
LAST REV DATE: 16/02/03