




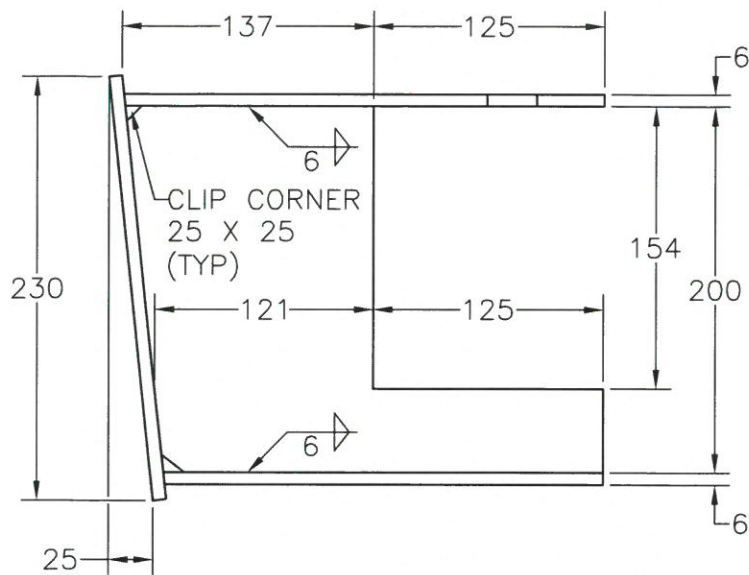

SECTION B-B

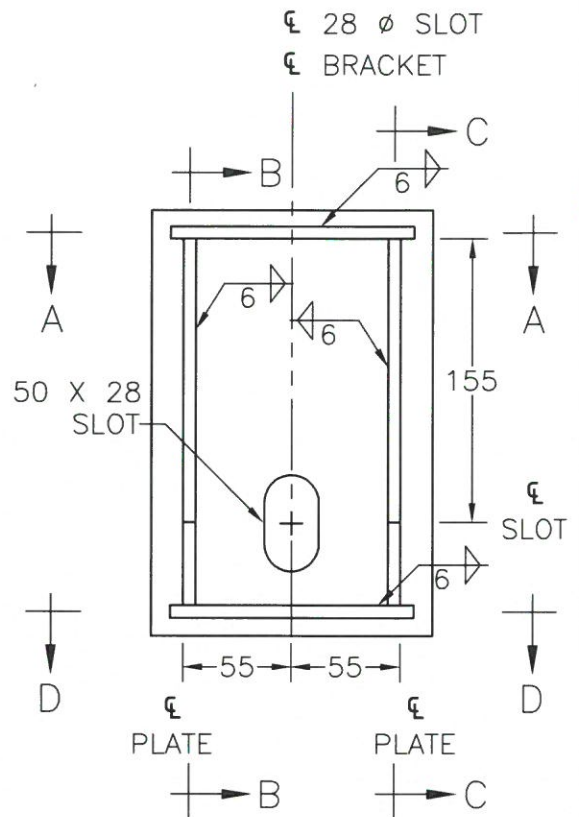


FRONT VIEW

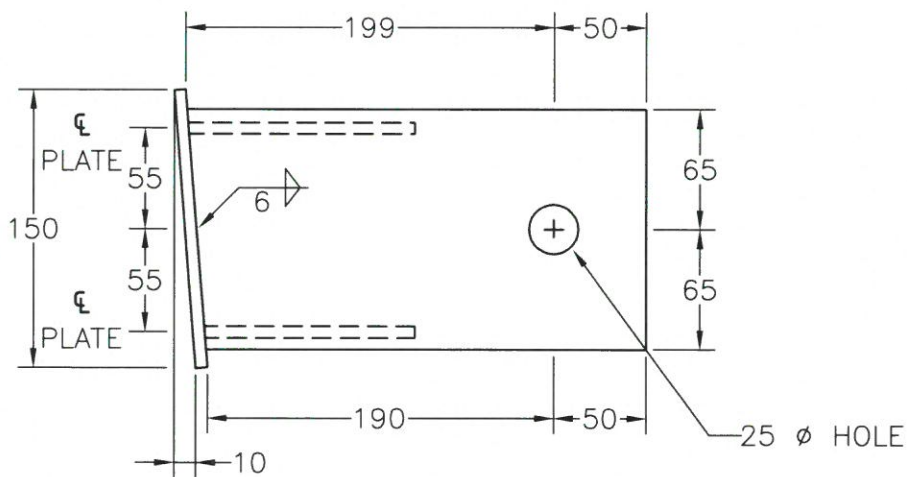


SECTION D-D

RECOMMENDED BY		DIRECTOR DESIGN & TRAFFIC ENG	DATE	2016-03-21	STANDARD PLAN NO	28815
APPROVED BY		EXECUTIVE DIRECTOR TECHNICAL STANDARDS BRANCH	DATE	May 5/16	SHEET	1 OF 2

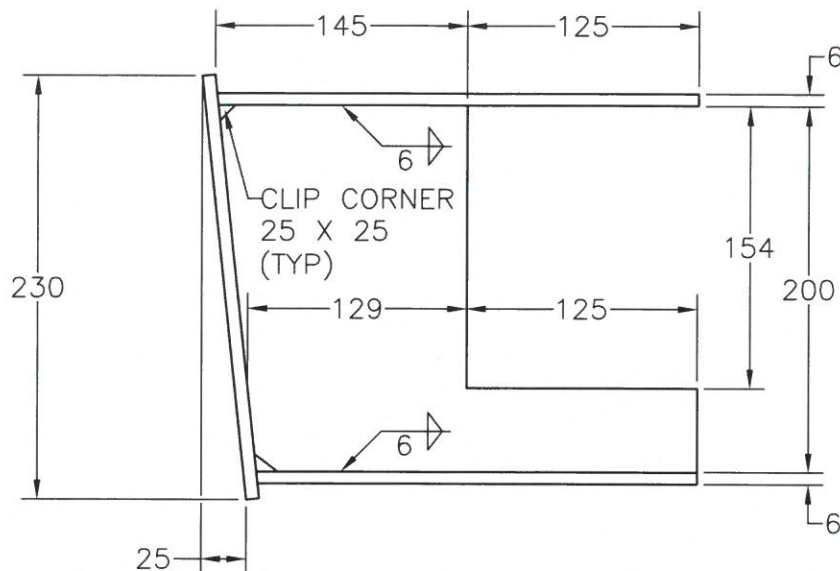

SECTION B-B

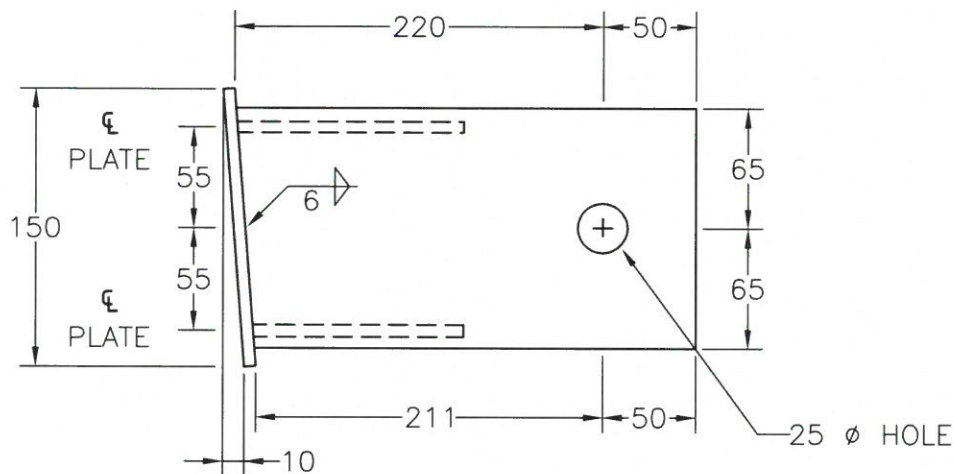

SECTION D-D

NOTES:

1. Details shown are for a "right hand" attachment, "left hand" attachment will be required on other side.
2. Material shall be 6 mm plate unless noted otherwise, and shall conform to CSA G40.21-M grade 300W.
3. All welds shall conform to CSA standard W59-M.
4. Bracket to be hot dip galvanized conforming to CSA standard G164.
5. Bracket may be cold-formed from single plate.
6. All dimensions in mm unless otherwise indicated.
7. Diagrams are not to scale.



**BRIDGE BARRIER TYPE 1
BOX BEAM ATTACHMENT BRACKET**

RECOMMENDED BY		DIRECTOR DESIGN & TRAFFIC ENG	DATE	2016-03-21	STANDARD PLAN NO	28815
APPROVED BY		EXECUTIVE DIRECTOR TECHNICAL STANDARDS BRANCH	DATE	May 5/16	SHEET	2 OF 2

ACAD DWG: SKS28815-2
LAST REV DATE: 16/01/27