



CLOSELY SPACED FLARED INTERSECTION TREATMENTS

CASE 1

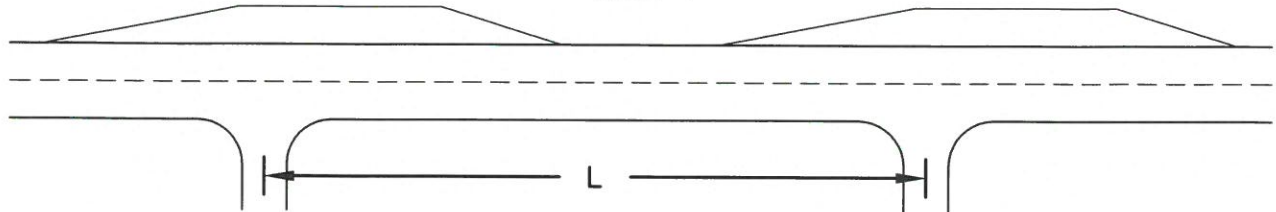

CASE 2

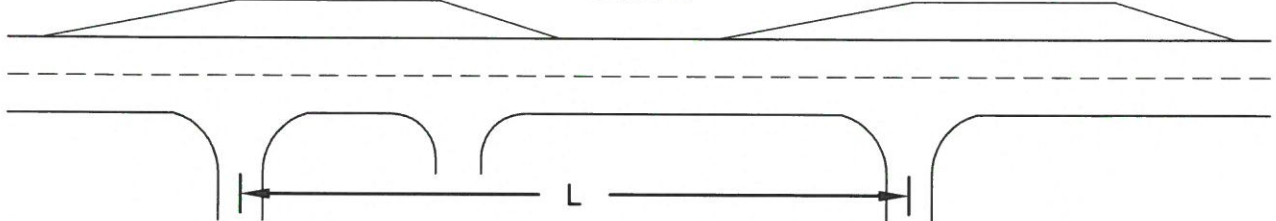

NOTES:

- Continuous intersection treatments should be used when intersections (on same side of road) are closely spaced, subject to the following:

CASE 1 – U 130 – 7430, when $L \leq 550$ m
Other classifications when $L \leq 530$ m

CASE 2 – when $L \leq 600$ m

- For additional information please refer to SKS 2.2.2–B & SKS 2.3.5–D.



MODIFICATIONS TO FLARED INTERSECTION TREATMENTS

RECOMMENDED BY		DIRECTOR DESIGN & TRAFFIC ENG	DATE	2016-03-30	STANDARD PLAN NO	20622
APPROVED BY		EXECUTIVE DIRECTOR TECHNICAL STANDARDS BRANCH	DATE	Apr 8, 2016	SHEET	1 OF 1

ACAD DWG: SKS20622
LAST REV DATE: 16/02/02