


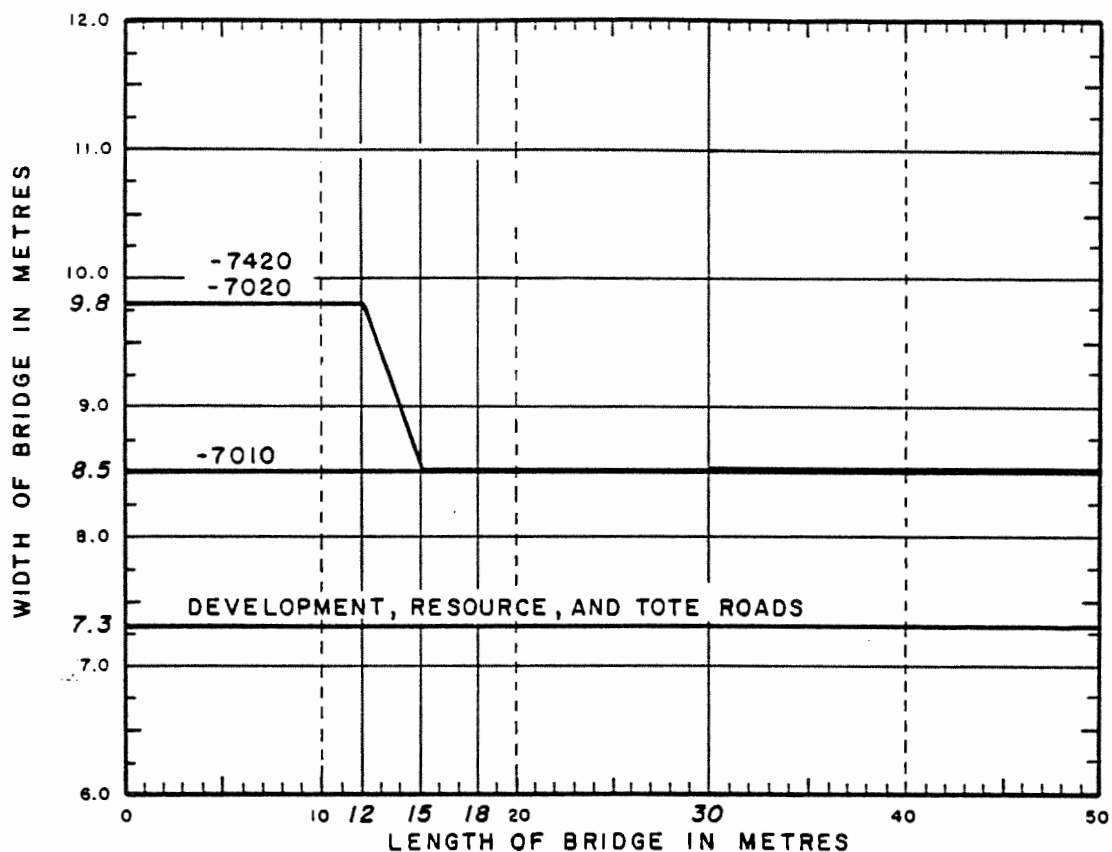

NOTES:

1. Widths shall be measured from face of curb to face of curb.
2. For precast decks constructed in 1.22m multiples, use width to the nearest 1.22m increment.
3. (a) Timber haul road bridge widths will conform to the standard having the same width as the haul road.
(b) Bridge widths specified in timber haul agreements may overrule the widths specified in this standard.
4. Bridges on spot improvements not on the long range program, should be referred to Road Design Branch for determination of bridge widths.

RECOMMENDED:
-- J. J. [Signature] --
DESIGN ENGINEER
APPROVED:
-- M. [Signature] --
CHIEF ENGINEER
DATE: AUG. 1, 1984

SASKATCHEWAN DEPARTMENT OF HIGHWAYS

**BRIDGE WIDTHS
ON PROVINCIAL ROADS**

STANDARD
PLAN
No.
20151